



**STONE & BLOCK PLAN VIEW**

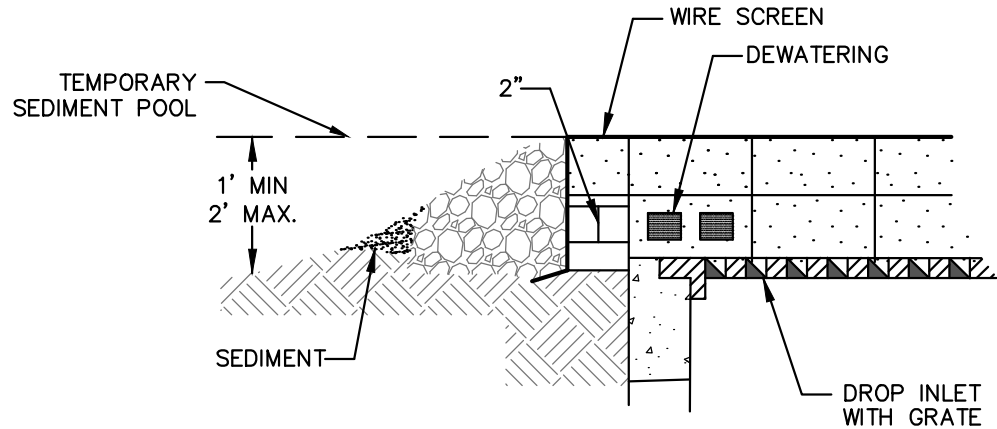

**STONE & BLOCK DETAIL**

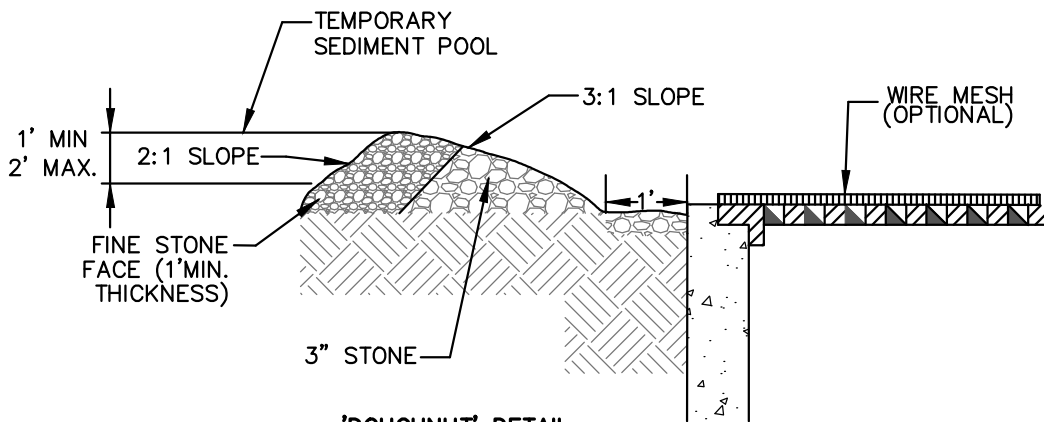

**'DOUGHNUT' DETAIL**

**NOTES:**

1. LAY ONE BLOCK ON EACH SIDE OF THE STRUCTURE ON ITS SIDE FOR DEWATERING. FOUNDATION SHALL BE 2 INCHES MINIMUM BELOW REST OF INLET AND BLOCKS SHALL BE PLACED AGAINST INLET FOR SUPPORT.
2. HARDWARE CLOTH OR ½" WIRE MESH SHALL BE PLACED OVER BLOCK OPENINGS TO SUPPORT STONE.
3. USE CLEAN STONE OR GRAVEL ½ TO ¾ INCH IN DIAMETER PLACED 2 INCHES BELOW TOP OF THE BLOCK ON A 2:1 SLOPE OR FLATTER.
4. FOR STONE STRUCTURES ONLY. A 1 FOOT THICK LAYER OF THE FILTER STONE WILL BE PLACED AGAINST THE 3 INCH STONE AS SHOWN ON THE DRAWINGS.

MAXIMUM DRAINAGE AREA 1 ACRE

VILLAGE OF MAMARONECK  
STANDARD CONSTRUCTION DETAILS

PREPARED IN THE  
OFFICE OF THE  
VILLAGE ENGINEER

**STONE AND BLOCK  
DRAIN INLET PROTECTION**

DESIGNED BY: ARC, PE      CHECKED BY: ARC, PE  
DRAWN BY: ARC, PE      VOM Stone & Block Inlet Protect



**VILLAGE OF MAMARONECK**  
VILLAGE MUNICIPAL BUILDING  
169 MT. PLEASANT AVENUE (3RD FLOOR)  
VILLAGE OF MAMARONECK, NY 10543  
PHONE: (914) 777-7731  
FAX: (914) 777-7792

PROJECT: DETAILS  
SCALE: NOT TO SCALE  
DATE: 03/13/2014

**SD-1G**