


PLAN VIEW

SIDEWALK CURB RAMP WITH DETECTABLE WARNING UNIT CONSISTING OF RAISED TRUNCATED DOMES (REFER TO VILLAGE STANDARD CONSTRUCTION DETAILS FOR RAMP AND DETECTABLE WARNING UNITS)

#3 bars 12" o.c. both ways top only with 2" cover

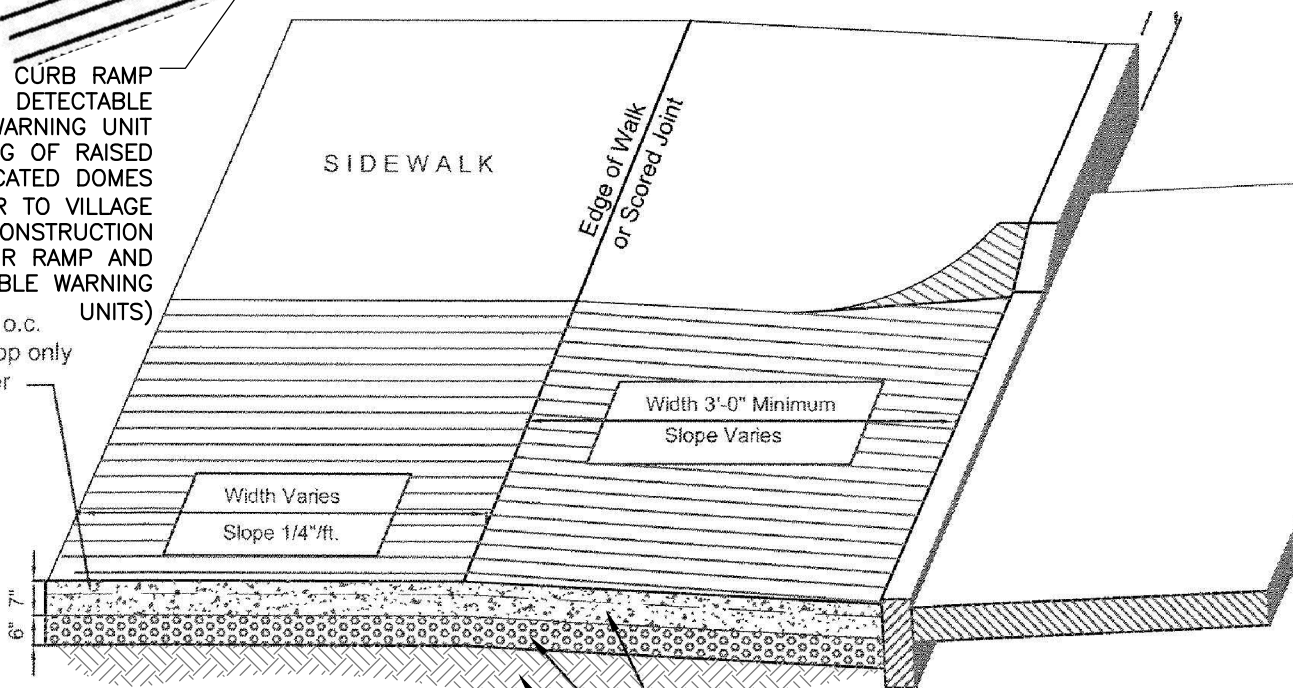

NOTES:

1. UNLESS OTHERWISE NOTED, PORTLAND CEMENT CONCRETE SIDEWALKS SHALL MEET THE SPECIFICATIONS OUTLINED IN SECTION 608 AND SUBSECTION 700 OF THE NEW YORK STATE DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS, DATED JANUARY 9, 2014 WITH LATEST REVISION.
2. CONVENTIONALLY FORMED CONCRETE SHALL MEET THE REQUIREMENTS FOR CLASS D IN ACCORDANCE WITH SECTION 501 "PORTLAND CEMENT CONCRETE--GENERAL."

REINFORCED CONCRETE DRIVEWAY

TYPICAL SECTION

- 7" THICK, NYSDOT CLASS 'D' CONCRETE (4,000 PSI) (NYSDOT ITEM NO. 608.0101)
- 6" THICK 3/4" APPROVED COMPACTED CLEAN WASHED CRUSHED STONE BASE COURSE (NYSDOT ITEM NO. 623.12, SIZE DESIGNATION 2)
- APPROVED COMPACTED SUBGRADE

VILLAGE OF MAMARONECK
STANDARD CONSTRUCTION DETAILS

PREPARED IN THE
OFFICE OF THE
VILLAGE ENGINEER

**PORTLAND CEMENT CONCRETE
TAPERED DRIVEWAY APRON
(SIDEWALK ABUTTING ROADWAY)**

DESIGNED BY: ARC, PE CHECKED BY: ARC, PE
DRAWN BY: ARC, PE VOM PCC Driveway.dwg



VILLAGE OF MAMARONECK
VILLAGE MUNICIPAL BUILDING
169 MT. PLEASANT AVENUE (3RD FLOOR)
WESTCHESTER COUNTY
VILLAGE OF MAMARONECK, NY 10543
PHONE: (914) 777-7731
FAX: (914) 777-7792

PROJECT: DETAILS
SCALE: NOT TO SCALE
DATE: 03/13/2014

SD-5E